



# **TAITIEN**

**QUARTZ CRYSTAL  
CRYSTAL OSCILLATOR  
VCXO  
VCTCXO / TCXO  
OCXO  
TIMING MODULE**



**TAIWAN  
EXCELLENCE  
2006**



**Our Performance, Your Reputation**



# Our Products

**OCXO**  
0.06-200ppb

**TCXO**  
0.1-2ppm

**Crystal Oscillators/  
VCXO**  
25-100ppm

**Crystal Units**  
10-100ppm



Marine Communication  
Aerial Radio  
Satellite  
Small cell  
Drone

- **VCXO, TCXO**  
- **X'TAL, TCXO**  
- **OCXO**  
- **TCXO, OCXO**  
- **X'TAL**



Car (ICE/IVI)  
GPS  
RKE, TPMS  
ADAS  
Autopilot

- **X'TAL, XO, TCXO**  
- **X'TAL, TCXO**  
- **X'TAL**  
- **X'TAL, XO**  
- **X'TAL, XO**








Watch  
DSC  
Mobile Phone  
HiFi, HD Video

- **Tuning Fork**  
- **X'TAL, XO**  
- **X'TAL, TCXO**  
- **X'TAL, XO**



Personal Computer  
Scanner  
Satellite TV  
Radio  
VR  
Cordless Telephone  
ADSL  
3G, 4G, 5G/LTE  
High Speed Network  
Base Station

- **X'TAL, XO**  
- **X'TAL, XO**  
- **X'TAL, TCXO**  
- **X'TAL, TCXO**  
- **X'TAL**  
- **X'TAL**  
- **X'TAL**  
- **X'TAL, XO**  
- **TCXO, OCXO**  
- **X'TAL, XO, VCXO, TCXO**  
- **VCXO, TCXO, OCXO**

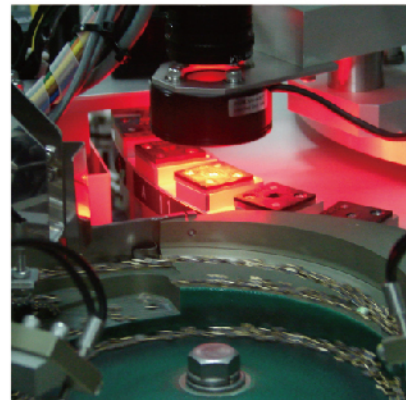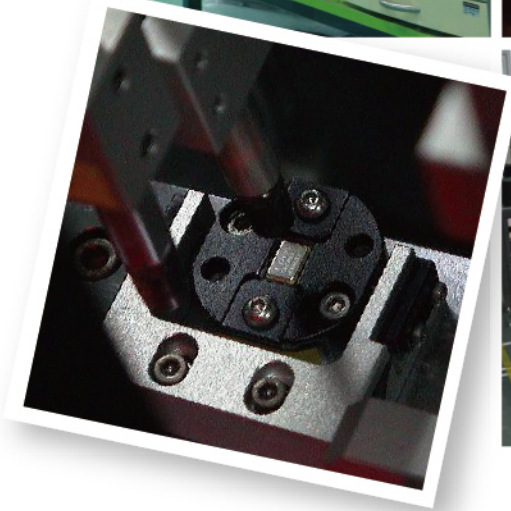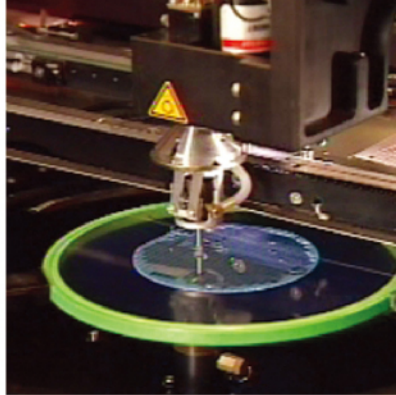

*Maintain sustainable competitive advantage from the satisfaction of customers, shareholders and employees*

Taitien Electronics, a Quartz Frequency Control Product (FCP) solution provider, started its first production run of Tuning Fork Crystal in 1976. Our main products include XTAL, OSC, VCXO, TCXO, and is the first manufacturer in Taiwan that provides the technique of OCXO and inverted mesa (Qmesa) quartz resonator.

Taitien service is capable of addressing one-stop procurement for all FCP requirements.

## Our missions are

- 1 Provide our customer with quality Frequency Control Products at competitive price.
- 2 Create knowledge from the integration of information technology and educational training.
- 3 Maintain our quality through continuous improvement; challenge the goal of zero defects.
- 4 Focus product innovation on our core technology.
- 5 To be a world-class Frequency Control Products manufacturer, building network of strategic alliances with quality resources to maintain our market competitiveness.





# Crystal Units

TYPE	PACKAGE	FREQ. RANGE	FEATURE
 X3 	<b>1.65 x 1.25 x 0.3mm</b> Ceramic SMD Package	24MHz~54MHz	<ul style="list-style-type: none"> <li>• Tight Tolerance</li> <li>• Ultra Low Profile</li> </ul>
 XZ 	<b>2.05 x 1.65 x 0.45mm</b> Ceramic SMD Package	16MHz~60MHz	<ul style="list-style-type: none"> <li>• Tight Tolerance</li> </ul>
 XY 	<b>2.5 x 2.0 x 0.45mm</b> Ceramic SMD Package	12MHz~54MHz	<ul style="list-style-type: none"> <li>• Tight Tolerance</li> </ul>
 XX-O 	<b>3.2 x 2.5 x 0.6mm</b> Ceramic SMD Package	12MHz~54MHz	<ul style="list-style-type: none"> <li>• Ultra Thin SMD Crystal</li> </ul>
 XX 	<b>3.2 x 2.5 x 0.7mm</b> Ceramic SMD Package	12MHz~60MHz	<ul style="list-style-type: none"> <li>• Tight Tolerance</li> </ul>
X2 	<b>3.2 x 2.5 x 0.75mm</b> Ceramic SMD package Glass Seal	12MHz~48MHz	<ul style="list-style-type: none"> <li>• Full Ceramic Package</li> </ul>
 XV 	<b>5.0 x 3.2 x 0.8mm</b> Ceramic SMD Package	8MHz~80MHz	<ul style="list-style-type: none"> <li>• Tight Tolerance</li> </ul>
XS 	<b>5.0 x 3.2 x 1.2mm</b> Ceramic SMD Package Glass Seal	8MHz~54MHz	<ul style="list-style-type: none"> <li>• Full Ceramic Package</li> </ul>
XR 	<b>6.0 x 3.5 x 1.0mm</b> Ceramic SMD Package	8MHz~50MHz	<ul style="list-style-type: none"> <li>• Tight Tolerance</li> </ul>
XQ 	<b>8.0 x 4.5 x 1.4mm</b> Ceramic SMD Package Glass Seal	7.3728MHz~70MHz	<ul style="list-style-type: none"> <li>• Full Ceramic Package</li> </ul>
 XI 	<b>10.8 x 4.5 x 3.4mm</b> Metal Can Through Hole Package	3.58MHz~80MHz	<ul style="list-style-type: none"> <li>• Standard Footprint</li> <li>• Low Profile For Close PCB Stacking</li> </ul>
XJ 	<b>12.5 x 4.5 x 4.0mm</b> Metal Can SMD Package	3.58MHz~80MHz	<ul style="list-style-type: none"> <li>• Metal Can SMD Package</li> </ul>











# Tuning Fork Crystal Units

TYPE	PACKAGE	FREQ. RANGE	FEATURE
 XB 	<b>1.0 x 4.6mm</b> <b>2.0 x 6.0mm</b> Through Hole Package	32.768kHz	<ul style="list-style-type: none"> <li>• Watch Crystal</li> </ul>
XA 	<b>3.0 x 8.0mm</b> Through Hole Package	32.768kHz	<ul style="list-style-type: none"> <li>• Watch Crystal</li> </ul>
 XD 	<b>2.0 x 1.2 x 0.6mm</b> <b>3.2 x 1.5 x 0.9mm</b> <b>4.1 x 1.5 x 0.9mm</b> Ceramic SMD Package	32.768kHz	<ul style="list-style-type: none"> <li>• Low Profile SMD Watch Crystal</li> </ul>
XN 	<b>6.9 x 1.4mm</b> <b>8.0 x 3.8mm</b> Plastic SMD Package	32.768kHz	<ul style="list-style-type: none"> <li>• SMD Watch Crystal</li> </ul>

# FASTXO Crystal Oscillators

TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
 PZ 	<b>2.05 x 1.65 x 0.75mm</b> Ceramic SMD Package	1 MHz~200MHz	CMOS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Smaller Size</li> <li>• Any Frequency</li> <li>• Operating Temp. up to 105°C</li> </ul>
 PY 	<b>2.5 x 2.0 x 0.81mm</b> Ceramic SMD Package	1 MHz~200MHz	CMOS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Custom Freq. from 1 to 200MHz</li> <li>• Low Standby Current</li> <li>• Any Frequency</li> <li>• Operating Temp. up to 105°C</li> </ul>
 PX 	<b>3.2 x 2.5 x 0.95mm</b> Ceramic SMD Package	1 MHz~200MHz	CMOS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Custom Freq. from 1 to 200MHz</li> <li>• Low Standby Current</li> <li>• Any Frequency</li> <li>• Operating Temp. up to 105°C</li> </ul>
 PV 	<b>5.0 x 3.2 x 1.2mm</b> Ceramic SMD Package	1 MHz~200MHz	CMOS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Custom Freq. from 1 to 200MHz</li> <li>• Low Standby Current</li> <li>• Any Frequency</li> <li>• Operating Temp. up to 105°C</li> </ul>
 PC 	<b>7.0 x 5.0 x 1.3mm</b> Ceramic SMD Package	1 MHz~200MHz	CMOS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Any Frequency</li> <li>• Operating Temp. up to 105°C</li> </ul>

## Crystal Oscillators (CMOS Output)

TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
 OZ 	<b>2.05 x 1.65 x 0.75mm</b> Ceramic SMD Package	1.5MHz~50MHz	CMOS	<ul style="list-style-type: none"> <li>• Ultra-Compact and light</li> <li>• Low Jitter</li> <li>• Low Standby Current</li> </ul>
  OY 	<b>2.5 x 2.0 x 0.81mm</b> Ceramic SMD Package	32.768kHz~125MHz	CMOS	<ul style="list-style-type: none"> <li>• Low Jitter</li> <li>• Low Standby Current</li> <li>• Operating Temp. Up to 125°C</li> <li>• Enhanced Stability Support</li> </ul>
  OX 	<b>3.2 x 2.5 x 0.95mm</b> Ceramic SMD Package	32.768kHz~125MHz	CMOS	<ul style="list-style-type: none"> <li>• Low Jitter</li> <li>• Low Standby Current</li> <li>• Operating Temp. Up to 125°C</li> <li>• Enhanced Stability Support</li> </ul>
OV 	<b>5.0 x 3.2 x 1.2mm</b> Ceramic SMD Package	13.7kHz~160MHz	CMOS	<ul style="list-style-type: none"> <li>• Low Jitter</li> <li>• Low Standby Current</li> </ul>
OC 	<b>7.0 x 5.0 x 1.3mm</b> Ceramic SMD Package	13.7kHz~166MHz	CMOS	<ul style="list-style-type: none"> <li>• Low Jitter</li> <li>• Low Standby Current</li> </ul>




## Crystal Oscillators (LVPECL/LVDS/HCSL/CML Output)

TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
 OA 	<b>3.2 x 2.5 x 0.9mm</b> Ceramic SMD Package	10MHz~250MHz 90MHz~125MHz	LVPECL / LVDS HCSL	<ul style="list-style-type: none"> <li>• Very Low Jitter</li> <li>• Differential Logic</li> <li>• Up to 250MHz</li> </ul>
 OA-M 	<b>3.2 x 2.5 x 0.9mm</b> Ceramic SMD Package	10MHz~1.5GHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Low Jitter</li> <li>• Differential Logic</li> </ul>
 OW 	<b>5.0 x 3.2 x 1.25mm</b> Ceramic SMD Package	10MHz~320MHz 25MHz~175MHz	LVPECL / LVDS HCSL	<ul style="list-style-type: none"> <li>• Very Low Jitter</li> <li>• Differential Logic</li> <li>• Up to 320MHz</li> </ul>
 OW-M 	<b>5.0 x 3.2 x 1.25mm</b> Ceramic SMD Package	10MHz~1.5GHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Differential Logic</li> <li>• Up to 1.5GHz</li> </ul>
 OJ-M 	<b>5.0 x 3.2 x 1.4mm</b> Ceramic SMD Package	15MHz~2.1GHz 15MHz~700MHz	LVPECL / LVDS / CML HCSL	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Ultra Low Jitter</li> <li>• Differential Logic</li> </ul>
  OT 	<b>7.0 x 5.0 x 1.45mm</b> Ceramic SMD Package	10MHz~320MHz 25MHz~175MHz	LVPECL / LVDS HCSL	<ul style="list-style-type: none"> <li>• Very Low Jitter</li> <li>• Differential Logic</li> <li>• Up to 320MHz</li> </ul>
 OT-M 	<b>7.0 x 5.0 x 1.45mm</b> Ceramic SMD Package	10MHz~1.5GHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Low Jitter</li> <li>• Differential Logic</li> <li>• Up to 1.5GHz</li> </ul>
 OD-M 	<b>7.0 x 5.0 x 1.7mm</b> Ceramic SMD Package	15MHz~2.1GHz 15MHz~700MHz	LVPECL / LVDS / CML HCSL	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Ultra Low Jitter</li> <li>• Differential Logic</li> </ul>

# Voltage Controlled Temperature Compensated Crystal Oscillators














TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
 TZ 	<b>2.0 x 1.6 x 0.7mm</b> Ceramic SMD Package	10MHz~52MHz	Clipped Sine Wave	<ul style="list-style-type: none"> <li>±0.5ppm@-40~+85°C</li> <li>Miniature SMD Type</li> <li>Low Power Consumption</li> <li>VCTCXO Available</li> </ul>
 TY 	<b>2.5 x 2.0 x 0.7mm</b> Ceramic SMD Package	10MHz~52MHz	Clipped Sine Wave	<ul style="list-style-type: none"> <li>±0.5ppm@-40~+85°C</li> <li>Low Power Consumption</li> <li>VCTCXO Available</li> </ul>
 TY-J 	<b>2.5 x 2.0 x 0.85mm</b> Ceramic SMD Package	9.5MHz~60MHz	CMOS	<ul style="list-style-type: none"> <li>Low Power Consumption</li> </ul>
 TX 	<b>3.2 x 2.5 x 0.9mm</b> Ceramic SMD Package	10MHz~52MHz	Clipped Sine Wave	<ul style="list-style-type: none"> <li>±0.5ppm@-40~+85°C</li> <li>Low Power Consumption</li> <li>VCTCXO Available</li> </ul>
 TX-J 	<b>3.2 x 2.5 x 0.95mm</b> Ceramic SMD Package	9.5MHz~60MHz	CMOS	<ul style="list-style-type: none"> <li>Low Power Consumption</li> </ul>
  TX-P 	<b>3.2 x 2.5 x 1.6mm</b> Ceramic SMD Package	10MHz~1.5GHz	CMOS / LVPECL / LVDS	<ul style="list-style-type: none"> <li>High Frequency</li> <li>Fast Delivery</li> <li>±1.0ppm @-30~+85°C</li> <li>Differential Logic</li> </ul>
 TL High Precision Stratum3 	<b>5.0 x 3.2 x 1.85mm</b> Ceramic SMD Package	10MHz ~ 52MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>High Precision for ±0.1ppm @-20~+70°C ±0.2ppm @-40~+105°C</li> </ul>
 TW High Precision 	<b>5.0 x 3.2 x 1.55mm</b> Ceramic SMD Package	10MHz~52MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>High Precision for ±0.1ppm @-20~+70°C ±0.2ppm @-40~+85°C</li> </ul>
 TS High Precision 	<b>7.0 x 5.0 x 1.9mm</b> Ceramic SMD Package	5MHz~52MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>High Precision for ±0.1ppm @-20~+70°C ±0.2ppm @-40~+85°C</li> </ul>
 TT Stratum3 	<b>7.0 x 5.0 x 1.9mm</b> Ceramic SMD Package	5MHz~52MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>Overall ±4.6ppm Including 20 Years Aging @-40~+85°C</li> </ul>
 TA 	<b>7.0 x 5.0 x 1.9mm</b> Ceramic SMD Package	5MHz~52MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>Low Power Consumption</li> <li>VCTCXO Available</li> </ul>
TK 	<b>14.3 x 8.7 x 4.9mm</b> Metal Cover, FR-4 PCB Based SMD Package	5MHz~40MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>FR-4 PCB Based</li> <li>Low Current Option</li> <li>VCTCXO Available</li> </ul>
TF 	<b>20.4 x 12.8 x 7.8mm</b> Metal Can Through Hole Package	1.25MHz~52MHz	CMOS / Clipped Sine Wave	<ul style="list-style-type: none"> <li>Standard DIP 14 Pin</li> <li>VCTCXO Available</li> </ul>

## Voltage Controlled Crystal Oscillators (CMOS/Sine Wave Output)

TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
  VA-M 	<b>3.2 x 2.5 x 0.9mm</b> Ceramic SMD Package	10MHz~250MHz	CMOS	<ul style="list-style-type: none"> <li>Fast Delivery</li> <li>Up to 250MHz</li> <li>Any Frequency</li> </ul>
 VW 	<b>5.0 x 3.2 x 1.25mm</b> Ceramic SMD Package	1.5MHz~170MHz	CMOS	<ul style="list-style-type: none"> <li>Tight Symmetry</li> <li>Low Jitter</li> </ul>
  VW-M 	<b>5.0 x 3.2 x 1.25mm</b> Ceramic SMD Package	10MHz~250MHz	CMOS	<ul style="list-style-type: none"> <li>Fast Delivery</li> <li>Up to 250MHz</li> <li>Any Frequency</li> </ul>
 VT 	<b>7.0 x 5.0 x 1.75mm</b> Ceramic SMD Package	1.5MHz~170MHz	CMOS	<ul style="list-style-type: none"> <li>Tight Symmetry</li> <li>Low Jitter</li> </ul>
 VT-M 	<b>7.0 x 5.0 x 1.45mm</b> Ceramic SMD Package	10MHz~250MHz	CMOS	<ul style="list-style-type: none"> <li>Fast Delivery</li> <li>Up to 250MHz</li> <li>Any Frequency</li> </ul>
VLCU 	<b>14.0 x 9.0 x 3.6mm</b> Metal Can SMD Package	50MHz~125MHz	Sine Wave	<ul style="list-style-type: none"> <li>Ultra Low Phase Noise</li> <li>Low Power Consumption</li> </ul>



# Voltage Controlled Crystal Oscillators (LVPECL/LVDS/HCSL Output)

TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
 VA-M 	<b>3.2 x 2.5 x 0.9mm</b> Ceramic SMD Package	10MHz~1.5GHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Wide Pulling Range</li> <li>• Differential Logic</li> <li>• Low Jitter</li> </ul>
 VW 	<b>5.0 x 3.2 x 1.25mm</b> Ceramic SMD Package	30MHz~250MHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Tight Symmetry</li> <li>• Differential Logic</li> <li>• Very Low Jitter</li> </ul>
 VW-M 	<b>5.0 x 3.2 x 1.25mm</b> Ceramic SMD Package	10MHz~1.5GHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Fast Delivery</li> <li>• Wide Pulling Range</li> <li>• Differential Logic</li> <li>• Low Jitter</li> </ul>
VJ-M 	<b>5.0 x 3.2 x 1.4mm</b> Ceramic SMD Package	15MHz~2.1GHz	CMOS / LVPECL / LVDS / CML / HCSL	<ul style="list-style-type: none"> <li>• Wide Pulling Range</li> <li>• Up to 2.1G</li> <li>• Very Low Jitter Type:150fs</li> </ul>
 VT 	<b>7.0 x 5.0 x 1.75mm</b> Ceramic SMD Package	1.5MHz~200MHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Tight Symmetry</li> <li>• Wide Pulling Range</li> <li>• Differential Logic</li> <li>• Very Low Jitter</li> </ul>
 VT-M 	<b>7.0 x 5.0 x 1.45mm</b> Ceramic SMD Package	10MHz~1.5GHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• Tight Symmetry</li> <li>• Wide Pulling Range</li> <li>• Differential Logic</li> <li>• Up to 1.5GHz</li> <li>• Low Jitter</li> </ul>
VD-M 	<b>7.0 x 5.0 x 1.7mm</b> Ceramic SMD Package	15MHz~2.1GHz	CMOS / LVPECL / LVDS / CML / HCSL	<ul style="list-style-type: none"> <li>• Wide Pulling Range</li> <li>• Up to 2.1G</li> <li>• Very Low Jitter Type:150fs</li> </ul>
VK 	<b>14.2 x 9.3 x 5.4mm</b> Metal Cover, FR-4 PCB Based SMD Package	30MHz~250MHz	LVPECL / LVDS	<ul style="list-style-type: none"> <li>• FR-4 PCB Based</li> <li>• Differential Logic</li> </ul>

# Oven Controlled Crystal Oscillators

TYPE	PACKAGE	FREQ. RANGE	OUTPUT	FEATURE
 NN 	<b>9.7 x 7.5 x 4.1mm</b> Metal Can SMD Package	10MHz~40MHz	Rectangular / Clipped Sine Wave	<ul style="list-style-type: none"> <li>• Low Power Consumption</li> <li>• <math>\pm 20</math>ppb Stability over <math>-40 \sim +85^{\circ}\text{C}</math></li> <li>• Stratum 3 (Overall <math>\pm 4.6</math>ppm Including 20 Years Aging)</li> </ul>
 NK-N 	<b>14.3 x 9.3 x 6.5mm</b> Metal Can SMD Package	5MHz~40MHz	CMOS	<ul style="list-style-type: none"> <li>• Low Power Consumption</li> <li>• Overall <math>\pm 4.6</math>ppm Including 20 Years Aging</li> <li>• Fast Warm-Up</li> </ul>
NK-H 	<b>14.3 x 9.3 x 8.2mm</b> Metal Can SMD Package	10MHz~40MHz	CMOS	<ul style="list-style-type: none"> <li>• Low Power Consumption</li> <li>• SC-CUT Crystal</li> <li>• High Stability</li> <li>• Low Phase Noise</li> <li>• Fast Warm-Up</li> </ul>
 NF 	<b>20.3 x 12.7 x 11.0mm</b> Metal Can Through Hole Package	5MHz~40MHz	CMOS	<ul style="list-style-type: none"> <li>• AT or SC Cut Crystal</li> <li>• Standard DIP 14 Pin</li> <li>• Excellent Stability</li> <li>• SMD Optional</li> <li>• NF-25MHz-2050 Series <small>(Fast Delivery: 1 Week, Quantity &lt;= 20pcs)</small></li> </ul>
 NA 	<b>25.4 x 25.4 x 12.7mm</b> Metal Can Through Hole Package	5MHz~100MHz	LVTTTL / Sine Wave	<ul style="list-style-type: none"> <li>• SC-CUT Crystal</li> <li>• High Stability</li> <li>• Low Phase Noise</li> <li>• Fast Warm-Up</li> <li>• NA-10MHz-2000/NA-10MHz-2500 Series <small>(Fast Delivery: 1 Week, Quantity &lt;= 20pcs)</small></li> </ul>
NJ 	<b>25.4 x 22.1 x 11.0mm</b> Metal Can SMD Package	5MHz~100MHz	CMOS / Sine Wave	<ul style="list-style-type: none"> <li>• SC or AT Cut Crystal</li> <li>• High Stability</li> <li>• Low Phase Noise</li> <li>• Fast Warm-Up</li> </ul>
 NI 	<b>36.3 x 27.2 x 12.7mm</b> Metal Can Through Hole Package	5MHz~100MHz	LVTTTL / Sine Wave	<ul style="list-style-type: none"> <li>• SC-CUT Crystal</li> <li>• High Stability</li> <li>• Stratum 3E Compliant</li> <li>• Up to <math>-110\text{dBc}</math> @ 1Hz</li> <li>• NI-10MHz-2400/NI-10MHz-2500/NI-100MHz-2900 Series <small>(Fast Delivery: 1 Week, Quantity &lt;= 20pcs)</small></li> </ul>
NP 	<b>20.6 x 20.6 x 11.0mm</b> Metal Can Through Hole Package	5MHz~40MHz	CMOS	<ul style="list-style-type: none"> <li>• SC or AT Cut Crystal</li> <li>• Stratum 3E Compliant</li> <li>• High Stability</li> <li>• Up to <math>-110\text{dBc}</math> @ 1Hz</li> </ul>

**Taitien Electronics Co., LTD (Headquarters)**

No.5, Shutan Street, Shulin Dist., New Taipei City 238, Taiwan, ROC  
Tel: +886-2-2686-1287 Fax: +886-2-2681-9610

**Taitien Electronics (Nanjing) Co., Ltd. / East China Office**

Jiangning Economic & Technology Development Zone, No.18, Chi-Tian Road,  
Nanjing, Jiangsu, China 211100  
Tel: +86-025-5210-8713 Fax: +86-025-5210-2580

**Taitien Electronics (Shenzhen) Co., Ltd. / South China Office**

8F., Block 7, Nanyou Tian'an Industrial Estate, Nanshan Dist., Shenzhen,  
Guangdong, China 518054  
Tel: +86-755-2652-2955 Fax: +86-755-2605-2967

**Wintron Electronics Co., Ltd.**

2# High-Technology industrial park 129 Fifth street, Zhengzhou National  
Economic & Technological Development Area Henan Province, P. R. China 450016  
Tel: +86-371-6739-1541 Fax: +86-371-6739-1546

**Taitien U.S.A. Inc.**

3720 Oceanic Way, Suite 210, Oceanside, CA 92056, USA  
Tel: +1-510-252-0686 Fax: +1-510-252-0148

**Isotemp Research Inc.**

1801 Broadway Street, Charlottesville, VA 22902, USA  
Tel: +1-434-295-3101 Fax: +1-434-481-8020

**Colorado Crystal Corporation**

2303 West 8th Street, Loveland, CO 80537, USA  
Tel: +1-970-667-9248 Fax: +1-970-667-3500

**Pletronics, Inc.**

19013 36th Ave W Lynnwood, WA 98036  
Tel: +1-425-776-1880 Fax: +1-425-776-2760



Website: [www.taitien.com](http://www.taitien.com)  
E-mail: [sales@taitien.com.tw](mailto:sales@taitien.com.tw)



Version 16 / 2020