


OA-M Type High Frequency up to 1.5GHz 3.2 x 2.5 mm SMD Differential Output Crystal Oscillator

FEATURE

- Low power supply voltage: 3.3, 2.5 supply options
- Differential output : LVPECL, LVDS
- Frequency support from 10MHz to 1.5GHz
- Low noise typical: 0.8 ps at 12kHz to 20MHz frequency offsets
- Temperature range: -40 to 85 °C operation
- Pb-free/RoHS compliant


TYPICAL APPLICATION

- High-Speed Gigabite Ethernet, Fiber Channel, Storages Area Network, SONET
- Enterprise Server, SAS/SATA - Microprocessors/DSP/FPGA
- Broadband Access - Smart Grid




RoHS Compliant

DIMENSION (mm)

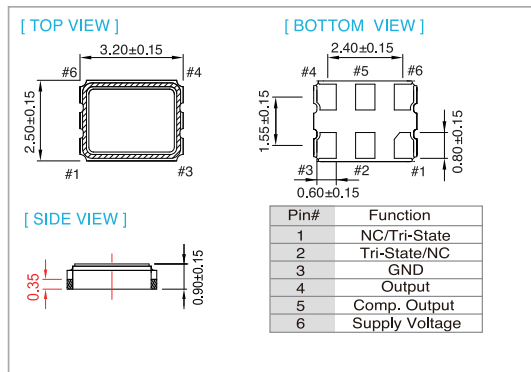

SOLDER PAD LAYOUT (mm)

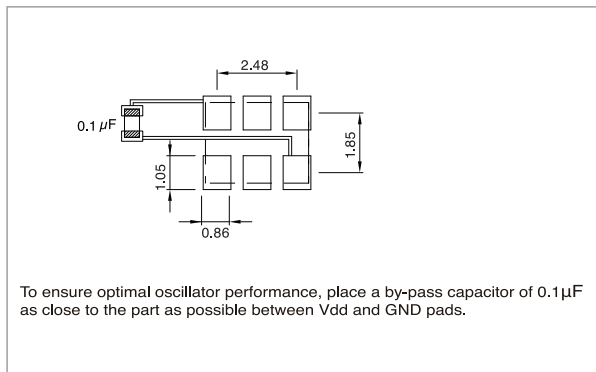

ELECTRICAL SPECIFICATION

Parameter	LVPECL				LVDS				unit
	3.3 V		2.5 V		3.3 V		2.5 V		
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (V _{DD})	V _{DD} -10%	V _{DD} +10%	V _{DD} -5%	V _{DD} +5%	V _{DD} -10%	V _{DD} +10%	V _{DD} -5%	V _{DD} +5%	V
Frequency Range	10	1500	10	1500	10	1500	10	1500	MHz
Supply Current	—	50	—	45	—	45	—	35	mA
Output Level	Output High	2.27	2.7	1.47	1.9	—	1.6	—	1.6
	Output Low	1.45	1.7	0.65	0.9	0.9	—	0.9	—
Transition Time (10%-90%)	Rise Time / Fall Time	—	1.0	—	1.0	—	1.0	—	1.0
Duty Cycle		45	55	45	55	45	55	45	55
Startup Time		—	10	—	10	—	10	—	10
Tri-State mode (Input to Pin 2)	Enable	0.7 x V _{DD}	—	0.7 x V _{DD}	—	0.7 x V _{DD}	—	0.7 x V _{DD}	—
	Disable	—	0.3 x V _{DD}	—	0.3 x V _{DD}	—	0.3 x V _{DD}	—	0.3 x V _{DD}
Stand by Current		—	18	—	18	—	18	—	18
Output Loading		50 into V _{DD} -2V				100			
Phase Noise		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
At V _{DD} =3.3V, f _{out} =250MHz	1kHz offset	-107	—	-107	—	-107	—	-107	—
	10kHz offset	-111	—	-111	—	-111	—	-111	—
	100kHz offset	-114	—	-114	—	-114	—	-114	—
	1MHz offset	-125	—	-125	—	-125	—	-125	—
	20MHz offset	-147	—	-147	—	-147	—	-147	—
RMS Phase Jitter (12kHz to 20MHz)		0.8	1.5	0.8	1.5	0.8	1.5	0.8	1.5

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	25	50
-10 ~ +60	○	○	○
-20 ~ +70	○	○	○
-40 ~ +85	△	○	○

* ○: Available △:Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.